


NEU6212Z



**ENGINEERING CODE**  
269MB51

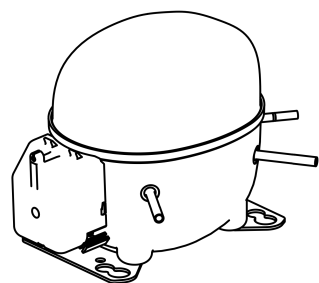

**REFRIGERANT**  
R-134a



**POWER SUPPLY**  
200-230 V 50  
Hz/208-230 V 60  
Hz



**APPLICATION**  
HBP



**STANDARD**  
ASHRAE



**MOTOR TYPE**  
CSCR



**COOLING CAPACITY**  
1472 W



**EFFICIENCY**  
2.57 W/W

DATA

GENERAL DATA

|                        |                                   |
|------------------------|-----------------------------------|
| Model                  | NEU6212Z                          |
| Type                   | Hermetic Reciprocating            |
| Technology             | ON/OFF                            |
| Compressor Application | HBP                               |
| Expansion Device       | Capillary Tube or Expansion Valve |
| Compressor Cooling     | Fan/200                           |
| HP                     | 1/2                               |
| Starting Torque        | HST                               |
| Plant                  | SLOVAKIA                          |

ELECTRICAL DATA

|                                  |                |
|----------------------------------|----------------|
| Start Winding Resistance         | 10.9 Ω at 25°C |
| Run Winding Resistance           | 3.59 Ω at 25°C |
| Locked Rotor Amperage (LRA) 50Hz | 26 A           |
| Locked Rotor Amperage (LRA) 60Hz | 26 A           |

## MECHANICAL DATA

|               |                       |
|---------------|-----------------------|
| Displacement  | 14.28 cm <sup>3</sup> |
| Oil Charge    | 350 ml                |
| Oil Type      | ESTER                 |
| Oil Viscosity | ISO22                 |
| Weight        | 11.6 Kg               |

## ELECTRICAL COMPONENTS

|                             |                  |
|-----------------------------|------------------|
| Start Capacitor             | 108-130 µf/330 V |
| Run Capacitor               | 12.5 µf/400 V    |
| CSR CSIR BOX                | Yes              |
| Starting Device Description | RVA3H3C-108      |
| Overload Protection         | MRA38173-3261    |

## PERFORMANCE

### TESTED CONDITIONS

|                         |        |
|-------------------------|--------|
| Tested Refrigerant      | R-134a |
| Tested Application      | HBP    |
| Tested Standard         | ASHRAE |
| Tested Cooling          | Fan    |
| Tested Voltage          | 200 V  |
| Refrigerant Temperature | Dew    |

### RATED POINTS

| Condensing Temperature °C | Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Power Consumption W | Current A | Gas Flow Rate kg/h |
|---------------------------|----------------------------|--------------------|----------------|---------------------|-----------|--------------------|
| 54.4                      | 7.2                        | 1472               | 2.57           | 572                 | 3.06      | 32.56              |

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

### PERFORMANCE CURVE

Condensing Temperature 35°C

| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Power Consumption W | Current A | Gas Flow Rate kg/h |
|----------------------------|--------------------|----------------|---------------------|-----------|--------------------|
| -15                        | 705                | 2.25           | 313                 | 2.03      | 13.00              |
| -10                        | 895                | 2.59           | 346                 | 2.13      | 16.57              |
| -5                         | 1119               | 2.91           | 384                 | 2.25      | 20.80              |
| 0                          | 1380               | 3.27           | 422                 | 2.39      | 25.75              |
| 5                          | 1679               | 3.70           | 454                 | 2.56      | 31.51              |
| 10                         | 2019               | 4.25           | 475                 | 2.76      | 38.14              |

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

## PERFORMANCE CURVE

Condensing Temperature 45°C

| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Power Consumption W | Current A | Gas Flow Rate kg/h |
|----------------------------|--------------------|----------------|---------------------|-----------|--------------------|
| -15                        | 622                | 1.81           | 343                 | 2.10      | 12.40              |
| -10                        | 794                | 2.11           | 376                 | 2.24      | 15.89              |
| -5                         | 999                | 2.38           | 420                 | 2.39      | 20.06              |
| 0                          | 1236               | 2.64           | 469                 | 2.57      | 24.96              |
| 5                          | 1511               | 2.92           | 518                 | 2.77      | 30.68              |
| 10                         | 1823               | 3.24           | 563                 | 2.99      | 37.28              |

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.


## PERFORMANCE CURVE

Condensing Temperature 55°C

| Evaporating Temperature °C | Cooling Capacity W | Efficiency W/W | Power Consumption W | Current A | Gas Flow Rate kg/h |
|----------------------------|--------------------|----------------|---------------------|-----------|--------------------|
| -10                        | 696                | 1.78           | 392                 | 2.34      | 15.19              |
| -5                         | 879                | 2.02           | 434                 | 2.53      | 19.26              |
| 0                          | 1093               | 2.24           | 487                 | 2.74      | 24.09              |
| 5                          | 1340               | 2.45           | 546                 | 2.97      | 29.74              |
| 10                         | 1624               | 2.68           | 607                 | 3.22      | 36.29              |

Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.

## ENVELOPE

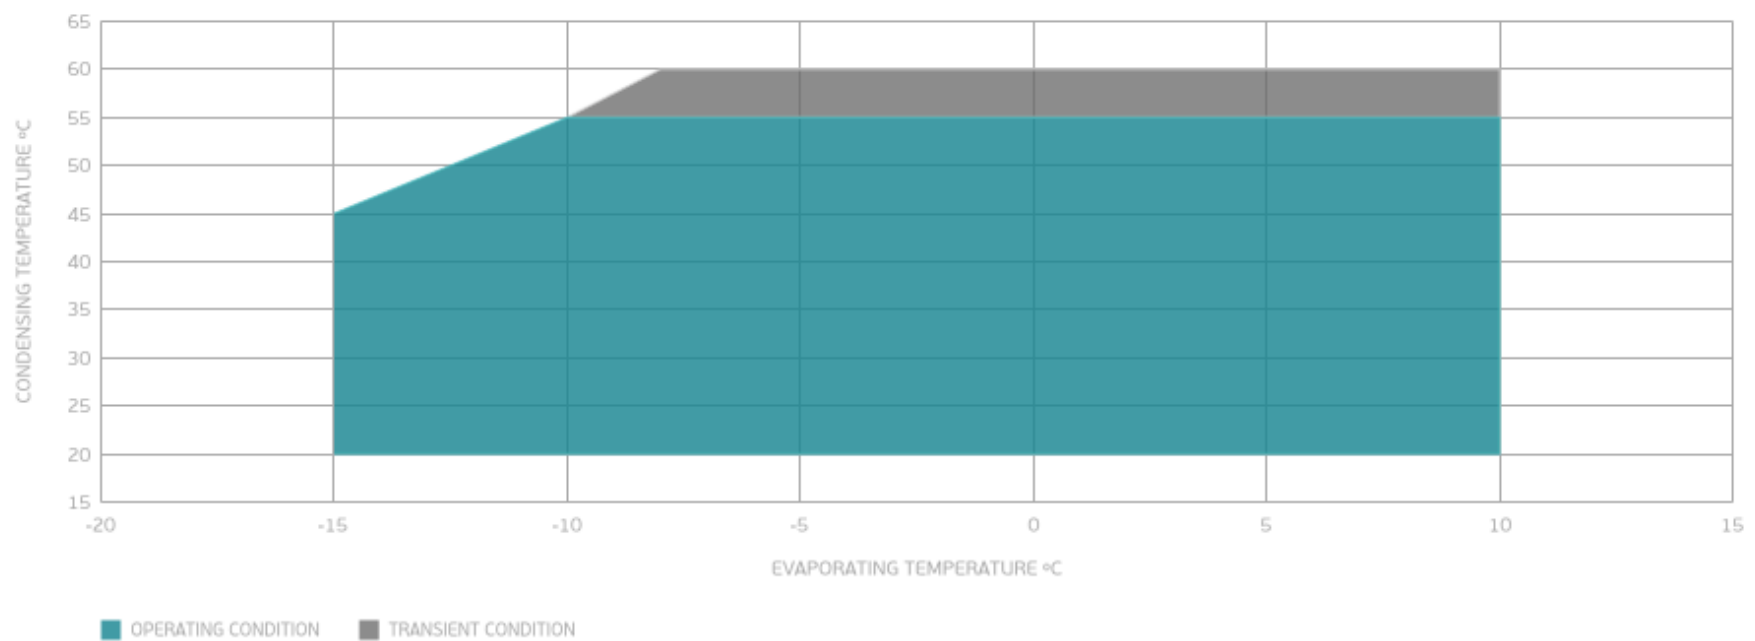


## External

### EXTERNAL CHARACTERISTICS


| Base Plate  |                   | SMALL       |          |
|-------------|-------------------|-------------|----------|
| Tray Holder |                   | NO          |          |
| Connector   | Internal Diameter | Shape       | Material |
| Suction     | 8.1 mm            | SLANTED 42° | COPPER   |
| Discharge   | 6.1 mm            | STRAIGHT    | COPPER   |
| Process     | 6.1 mm            | SLANTED 42° | COPPER   |

## EXTERNAL DIMENSIONS

### SHELL

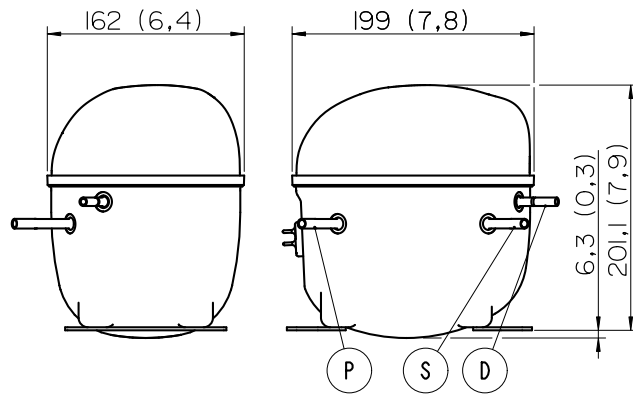

### BASE

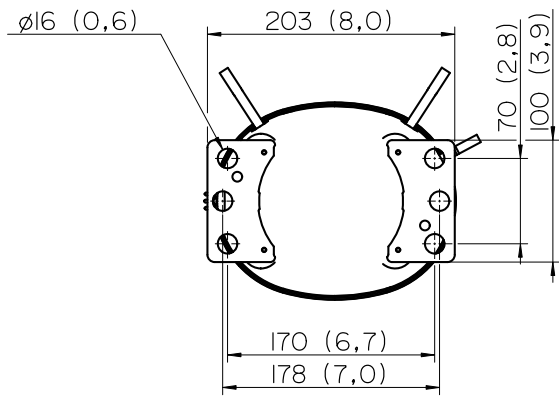

### FENCE

