



大圣纵横®
DASHENG ZONGHENG

HVAC/R
TOOLS
2024



金华市威科工贸有限公司
JINHUA WEIKE INDUSTRIAL & TRADING CO.,LTD.

地址: 金华市金东区岭下镇工业区松溪路33号
Add: NO.33 Songxi Road,Lingxia Industry Zone,
Jindong District,Jinhua,Zhejiang Province,China
电话/Tel: 0579-82832878 82832879 82832988
传真/Fax: 0579-82832886
网站/Http: www.cnzongheng.com
邮件/E-mail: dobest@cnzongheng.com



公众号
public number



官网
official website

制冷工具和真空泵专家

HVAC/R TOOLS AND VACUUM PUMPS SPECIALIST

企业简介 About us

金华市威科工贸有限公司坐落于浙江省金华市，是一家集科研开发、自主创新、生产、销售为一体的现代化科技型企业。公司一直致力于制造高品质的制冷工具，加注样、冷媒表组、冷媒回收机及真空泵。公司拥有多项国家发明专利及五十多项新型专利，并率先在行业内通过“ISO90001:2000质量管理体系”、欧洲CE等认证。公司占地面积62亩，标准化生产厂区42000余平方米，拥有现代化的生产线以及加工设备，员工300余人，技术骨干30余人。公司产品深受国内外新老客户的欢迎，目前已销售到全球七十余个国家和地区，成为全球制冷工具行业知名品牌。

公司先后被科技部、浙江省科技厅及市人民政府评为：“国家高新企业”、“浙江省科技型企业”和“金华市高科技企业”。产品层次荣获：“浙江省省级工业新产品（新技术）”、“金华市著名商标”、“科技项目二等奖”、“结构创新二等奖”。公司的技术研发能力以及技术成果，产品得到广泛认可。“大圣纵横”商标被业界权威机构评为：“明星品牌”“五金名品”“领先品牌”和“最受市场欢迎品牌”等多项殊荣。

大圣纵横，纵横国际！公司以发展成全球“高品质、高性价比”制冷工具及真空泵的标志为企业目标，秉承以人为本，质量第一的管理理念，锐意进取，勇于创新，致力于打造中国最现代化和最具规模的制冷工具行业生产专业企业。

JINHUA WEIKE INDUSTRIAL & TRADING CO.,LTD is located in Jinhua City,Zhejiang,China.It is a modern science and technology enterprise integrating scientific research, development, independent innovation, production and sales.Our company has been committed to manufacturing top quality refrigeration tools, charging scales, manifolds, recovery machines and vacuum pumps. With a number of National Invention Patents and more than fifty Utility Model Patents,JINHUA WEIKE has taken the lead to pass ISO9001:2000,CE,etc.quality management systems in the refrigeration tool industry.The company covers an area of 62 acres and has a standardized manufacture area of 42,000 square meters in which there are modern production lines and processing equipment,employ more than 300 employees and 30 technical backbones. DSZH products,which are popular by new and old customers at home and abroad,had been sold to more than 70 countries and regions around the world.DSZH brand also becomes a well-known brand in the global refrigeration tool industry.

JINHUA WEIKE has been rated as "National High-tech Enterprise", "Zhejiang Science and Technology Enterprise" and "Jinhua High-tech Enterprise" by the Ministry of Science and Technology, Zhejiang Science and Technology Department and Municipal People's Government. DSZH products have been awarded with "Zhejiang Provincial Industrial New Products (New Technology)", "Jinhua City Famous Trademark", "Technology Project Second Prize" and "Structural innovation Second Prize". The company's technology research and development capabilities are outstanding and its products are widely recognized. The trademark "DSZH" was awarded by the industry authorities as "Star Brand", "Hardware Famous Brand", "Leading Brand" and "Most Popular Brand In The Market" and so on.

DSZH,brilliant around the world! We aim to develop it into a global "high-quality, cost-effective" refrigeration tools and vacuum pumps iconic enterprise.With adhering to the people-oriented and quality-first management philosophy, keeping forging ahead, being innovative, we are committed to building the most modern and largest professional manufacturing enterprise in Chinese refrigeration tool industry area.





精尖的生产设备 超前的管理模式

公司拥有具备多年实际操作经验的工人与技术人员，以严谨而务实的作风，掌控着企业重要的生产与品质保证流程；与员工不断积累的经验与能力同步，在设备上的投资也不遗余力，各类尖端设备的引进，从制作环节上确立的领先优势。



目 录 CONTENTS

制冷工具和真空泵专家

HVAC/R TOOLS AND VACUUM PUMPS SPECIALIST



偏心扩管器 Eccentric Cone Flaring Tool
电动扩管器 Cordless & Electric Flaring Tool

P01-05



电动扎带机 A/C Cable Tie Tool
扩口胀管器 Flaring & Swaging Tool

P06-09



管子割刀 Tube Cutter
轴承式割刀 Roller Type Tube Cutter

P10-11



其它工具 Other HVAC/R Tools
胀管器 Tube Expander Tools

P12-17



弯管器套装 Tube Bender Kit
弯管器 Tube Bender

P18-21



检漏仪 Leak Detector
加注秤 Charging Scale

P22-26



真空计 Vacuum Meter
数显表 Digital Manifolds

P27-30



冷媒表组 Manifolds Gauge
加液管 Charging Hose

P31-35



快速接头 Quick Couplers
智能真空泵 Intelligent Vacuum Pumps

P36-43



真空泵 Vacuum Pumps
手提工具箱 Portable Box Set

P44-47



冷媒回收机
Recovery Unit

P48-49

可拆卸棘轮手柄
DETACHABLE RATCHET HANDLE



可配合电钻使用
CAN BE USED WITH ELECTRIC DRILL

高强度铝合金锻造
HIGH STRENGTH ALUMINUM ALLOY FORGING



螺纹保护套
THREAD PROTECTIVE SLEEVE

夹板限位片
SPLINT LIMIT PLATE

高强度铝合金夹板
HIGH STRENGTH ALUMINUM ALLOY SPLINT

◀ WK-806N-L

手电两用扩口器
Flaring Tool

专利产品 PATENTED

扩口精准 轻量化
ACCURATE FLARING LIGHTWEIGHT



Ball position simple and convenient operation
球体定位 操作方便快捷



Eccentric cone flaring standard
偏心扩口圆锥 扩口标准



Block limited plate standard positioning
夹板限位片 定位标准



Arc flange ergonomic design
圆弧夹板 人体工学设计



Can be used with electric drill
可配合电钻使用 轻松省力

型号 Item No.	品名规格 Description
WK-806N-A	For inch: 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-806N-M	For metric: 6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-806N-L	For inch: 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing. For metric: 6, 9, 10, 12, 16, 19mm O.D. Tubing. Packed in hand carrying plastic case. (收整手提箱包装)

WK-R806A ▶

45° 棘轮式偏心扩管器

45° Ratchet Eccentric Cone Type Flaring Tool

专利产品 PATENTED



WK-806A ▶

精准型偏心扩管器

Accuracy Eccentric Cone Flaring Tool

专利产品 PATENTED



扩口精准 工艺精湛

ACCURATE FLARING EXQUISITE WORKMANSHIP



Ball position simple and convenient operation
钢球定位 操作简单方便



Precision flared no leakage connect
精密扩口 焊接不漏气



Double ring bar permanent locking mechanism
双环万向锁 平衡不松动



Arc frame ergonomics design
圆弧定位 握持工程手设计



Ratchet fast forward port
棘轮快速前进 握持 适合狭小空间内使用

扩口精准 工艺精湛

ACCURATE FLARING EXQUISITE WORKMANSHIP



Ball position simple and convenient operation
钢球定位 操作简单方便



Precision flared no leakage connect
精密扩口 焊接不漏气



Double ring bar permanent locking mechanism
双环万向锁 平衡不松动



Arc frame ergonomics design
圆弧定位 握持工程手设计

型号 Item No.	品名规格 Description
WK-R806A	For inch: 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-R806M	For metric: 6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-R808A	For inch: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-R808M	For metric: 5mm, 6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-R806FT-L	WK-R806+WK-532+CT-207 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" & 6mm, 9mm, 10mm, 12mm, 16mm, 19mm O.D. Tubing Packed in hand carrying plastic case. (收管手提箱包装)
WK-R808FT-L	WK-R808+WK-532+CT-207 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" & 5mm, 6mm, 9mm, 10mm, 12mm, 16mm, 19mm O.D. Tubing Packed in hand carrying plastic case. (收管手提箱包装)

型号 Item No.	品名规格 Description
WK-806A	For inch: 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-806M	For metric: 6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-806A	For inch: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-806M	For metric: 5mm, 6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-809AM	For inch and metric: 6mm, 1/4", 5mm, 3/8", 10mm, 12mm, 1/2", 5/8" (16mm) & 3/4" (19mm) O.D. Tubing individual packed in color box. (单只彩盒包装)
WK-806AM-L	WK-806+CT-207 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing (6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing) packed in hand carrying plastic case. (收管手提箱包装)
WK-808AM-L	WK-808+CT-207 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing (5mm, 6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing) packed in hand carrying plastic case. (收管手提箱包装)
WK-806FT-L	WK-806+WK-532+CT-207 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" & 6mm, 9mm, 10mm, 12mm, 16mm, 19mm O.D. Tubing packed in hand carrying plastic case. (收管手提箱包装)
WK-808FT-L	WK-808+WK-532+CT-207 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" & 5mm, 6mm, 9mm, 10mm, 12mm, 16mm, 19mm O.D. Tubing packed in hand carrying plastic case. (收管手提箱包装)
WK-805FT-L	WK-805+WK-532+CT-207 1/2", 5/8", 3/4", 7/8", 1" & 12mm, 16mm, 19mm, 22mm, 25mm O.D. Tubing packed in hand carrying plastic case. (收管手提箱包装)

WK-519FT ▶

45° 一体式偏心扩孔器
45° Eccentric Cone Type Flaring Tool

专利产品 PATENTED



超级精准 快捷方便

SUPER ACCURACY FAST & CONVENIENT



夹管胶(支持定制)
Liners(Customizable)



限位垫片
Stopper Plate



统一扩口尺寸
Uniform Flares In Size



轻松夹管
Easy Clamp

产品技术参数 Technical Parameter

型号 Item No.	品名	规格 Description
WK-519FT-L	WK-519FT+WK-532 +CT-207	For inch and metric: 1/4", 6mm, 5/16"(8mm), 3/8", 10mm, 1/2", 12mm, 5/8"(16mm), 3/4"(19mm) O.D. Tubing Packed in hand carrying plastic case. (吹塑手提箱包装)

WK-E806AM-L ▶

充电式电动扩孔器
Electric Cordless Flaring Tool



产品技术参数 Technical Parameter

品名	规格 Description
WK-E806AM+WK-532 +CT-207+Spare battery+Charger(18V) +2 Steel bar	For inch: 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing For metric: 6mm, 8mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing Packed in hand carrying plastic case.(吹塑手提箱包装)

特快精准 经久耐用

SUPER FAST & ACCURATE SUPER DURABLE

充电式电动扩孔器套装

Electric Cordless Flaring Tool

专利产品 PATENTED

◀ WK-E800AM-L

产品技术参数 Technical Parameter

品名	规格 Description
WK-E800AM+WK-532 +WK-207+2 Clamp heads+Charger(18V) +7 Steel bar	For inch and metric: 6mm, 1/4", 5/16"(8mm), 3/8", 10mm, 12mm, 1/2", 5/8"(16mm) & 3/4"(19mm) O.D. Tubing packed in hand carrying plastic case. (吹塑手提箱包装)
Clamps Head 	





◀ WK-E900

电动胀管扩口器
Electric Expander & Flaring Tool

专利产品 PATENTED



精准胀管和扩口
Accurate Flaring & Expanding

产品技术参数 Technical Parameter

型号 Item No.	品名规格 Description
WK-E900	WK-E900 + WK-207 + WK-274 + WK-526 clamp + electric drill 扩管 Flare: 1/4", 3/8", 1/2", 5/8", 3/4" in carrying case. (吹塑盒包装) 胀管 Expand: 1/4", 3/8", 1/2", 5/8", 3/4", 7/8" in carrying case. (吹塑盒包装)

WK-600 ▶

电动扎带机
A/C Cable Tie Tool

专利产品 PATENTED




轻按缠绕 工作省力

FAST WINDING EASY WORK

型号 Item No.	WK-600
电压 Voltage	12 V
电流 Currents	1.5 AH
转速 Motor speed	70~380 R/min
功率 Power	27 W
重量 Weight	1.2 kg
续航时间 Battery time	70分钟 (70mins)
外形尺寸 Dimension	300x250x200 mm
最大工件直径 Max workpiece diameter	外径(O.D.) ≤ 70mm

WK-T800 ▶

T型拉孔器 Tee-Extractor Sets



拉钩尺寸 Extractor Heads Size							
10mm	12mm	16mm	19mm	22mm	25mm	28mm	32mm
3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/8"	1-1/4"

45° 偏心式扩管器

45° Eccentric Cone Type Flaring Tools

型号 Item No.	品名规格 Description
WK-813	WK-R806AM 扩管器 WK-274 刮刀 CT-209 刮角器 CT-207 刮角刀 CT-96 刮针 CT-102-L 精品弹簧管割器 CT-122 棘轮扳手 + 手锯箱 WK-R806AM Flaring Tool; WK-274 Tube Cutter; CT-209 Reamer; CT-207 Deburrer; CT-96 Swaging Punch; CT-102-L Spring Bender; CT-122 Ratchet Wrench
CT-806A	For inch: 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing
CT-806M	For metric: 6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing
CT-808A	For inch: 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. Tubing
CT-808M	For metric: 5mm, 6mm, 9mm, 10mm, 12mm, 16mm & 19mm O.D. Tubing
CT-806AM-L	CT-806+WK-274 +CT-208 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" & 6mm, 9mm, 10mm, 12mm, 16mm, 19mm O.D. Tubing Packed in hand carrying plastic case. (吹塑手锯箱包装)
CT-808AM-L	CT-808+WK-274 +CT-208 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" & 5mm, 6mm, 9mm, 10mm, 12mm, 16mm, 19mm O.D. Tubing Packed in hand carrying plastic case. (吹塑手锯箱包装)


CT-275/CT-2000
45° 精品胀管扩孔套装

45° Flaring & Swaging Tool Kit

CT-275

 Flares 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8" & 3/4" O.D.
 Includes 5 swage adapters that swage 7 tube sizes 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" O.D.

CT-2000

 For 3/16", 1/4", 5/16", 3/8", 7/16", 1/2" & 5/8" O.D.
 Includes 6mm, 8mm, 10mm, 12mm, 16mm & 19mm O.D.
 Packed in hand carrying plastic case.

45° 精品胀管扩孔套装

45° Flaring & Swaging Tool Kit

CT-275
CT-274

Tube Cutter 1/8" ~ 1-1/8" (3-28mm)

CT-122

 Ratchet Wrench for 1/4", 3/8", 3/16", 5/16"
 Packed in hand carrying plastic case.

CT-278

CT-1226-AL
45° 精品扩管器+割刀套装

45° Flaring & Cutter Tool Kit

CT-195 Flaring Tool

CT-274 Tube Cutter

Packed in hand carrying plastic case.

45° 双层式扩管器工具组

45° Double Flaring Tool Kits

CT-96FB

 Flares 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8" & 6mm, 8mm, 10mm, 12mm, 16mm, 19mm O.D. Tubing.
 Includes 7 double flaring adapters
 Which cover 3/16", 1/4", 5/16", 3/8", 7/16", 1/2" & 5/8" O.D. Tubing
 Packed in hand carrying plastic case.

CT-96FB
CT-526-F
万能扩管器

DSZH Grabber Flaring Tool

For 3/16" to 3/4" & 5mm to 19mm O.D.


CT-525-F

For 3/16" to 5/8" & 5mm to 16mm O.D.


CT-500
CT-505
活块扩孔器

Blocks Type Flaring Tool

 For 3/16", 1/4", 5/16", 3/8", 1/2" & 5/8" O.D.
 For 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D.

CT-195
45° 扩孔器

45° Flaring Tool

For 3/16", 1/4", 5/16", 3/8", 7/16", 1/2" & 5/8" O.D.


CT-203

For 5/8", 3/4", 7/8", & 1-1/8" O.D.

智慧型弹簧割刀 ▶

SMART SPRING TUBE CUTTER

WK-274S/312S

For $\Phi 1/8"$ to 1-1/8"

For $\Phi 1/4"$ to 1-5/8"



管子割刀 ▶

DSZH TUBE CUTTER



WK-127

For $\Phi 1/8"$ to 5/8" (3-16mm)



WK-128

For $\Phi 1/8"$ to 7/8" (3-22mm)



WK-174

For $\Phi 1/8"$ to 1-1/8"



WK-206

For 10-66mm (3/8" to 2-5/8") O.D. tubing



WK-274/312

For $\Phi 1/8"$ to 1-1/8"

For $\Phi 1/4"$ to 1-5/8"



WK-670



WK-650



WK-532



WK-428



WK-319

- ★ Ball bearings make the difference!
- ★ Great Cuts with the greatest of ease!
- ★ High-quality radial ball bearings enable DSZH tube cutters to cut with less effort than any previous models.

- ★ 合金钢刀片：锋利耐用
- ★ 滚珠轴承：灵活精准
- ★ 铝合金刀体：轻便省力

轴承式割刀

DSZH ROLLER TYPE TUBE CUTTER



滚珠轴承刀片
BEARING BLADE



轴承滚轮
BEARING ROLLER



轻松割管 统一圈内切割
EASY CUT IN A CIRCLE

产品技术参数 Technical Parameter

型号 Item No.	品名规格 Description	材质 Material
WK-319	For $\Phi 1/8"$ to 3/4" (3-19mm)	Zinc alloy body 锌合金刀体
WK-428	For $\Phi 3/16"$ to 1-1/8" (4-28mm)	
WK-532	For $\Phi 3/16"$ to 1-1/4" (5-32mm)	
WK-650	For $\Phi 1/4"$ to 2" (6-50mm)	
WK-670	For $\Phi 1/4"$ to 2-3/4" (6-70mm)	Aluminum alloy body 铝合金刀体
WK-319B	For WK-319	
WK-428B	For WK-428	Alloy steel blade 合金钢刀片
WK-532B/650B	For WK-532/650	
WK-670B	For WK-670	



CT-204 A型封口器
Pinch-off Tool
In extra strong execution to pinch off suction tubes on all hermetic refrigeration systems up to 3/8" diameter.



WK-201 B型封口钳
7" Pinch off plier
Pinch of copper tubing up to 5/16" (8mm) instantly.



CT-208 内外烧刀
Inner-outer Reamer
Plastic body, 3/16" - 1-1/2" O.D. tubing.
Reams Both Inside and Outside Edges of Tubing.



CT-209 内外烧刀
Inner-outer Reamer
Zinc body, 1/4" - 1-5/8" O.D. tubing.
Reams Both Inside and Outside Edges of Tubing.



CT-351 塑料插片板
Fin Straightener
For 8.9, 10, 12, 14, 15 Spacings per inch.
适用于各种尺寸的翅片。



CT-352 不锈钢翅片刷
Fin Straightener
Fin straightener stainless steel. Cleaning & straightening evaporator fin.



CT-122 棘轮扳手
Ratchet Wrench
4 Sizes, 1/4", 3/8", 3/16", 5/16" square ratchet.



WK-123L 棘轮扳手
Ratchet Wrench
4 Sizes, 1/4", 3/16" square, 9/16", 1/2" hex ratchet.



PTC-01 毛细管剪刀
Capillary Tube Cutter
Cuts all sizes of capillary Tubes without collapsing nor swaging the tubes.



WK-207 转动倒角刀
Deburrer
Handy deburrer. Blade can be swivelled.
用于管道化材边缘去毛刺。小巧轻便，刀片可接材料旋转。



双环口袋镜
Inspect Mirror
Mirror O.D. 玻璃直径 32mm 50mm
Length closed 闭锁长度 127mm 203mm
Length open 拉伸长度 500mm 410mm
Diameter 杆子直径 8mm 10mm



CT-503 拾检工具
Pick Up Tools
Length closed, 120mm
Length open, 637mm
伸缩长度: 126-637毫米

多功能毛细管剪刀




PTC-02

胀管棒 Swaging Punch Tools



弯管弹簧 Bender Spring




WK-01

拆装空调机专用扳手

Air Conditioner Installation Spanner

专利产品 PATENTED




强磁吸力 STRONG MAGNET
可更换空调外机机脚螺丝 14MM/17MM
USE FOR 14MM & 17MM UNITS

使用说明 Operation Guide



Put screw in spanner
强磁吸住螺丝



Easy installation
轻松拆装



Very dangerous
非常危险

WK-030

自动点火焊枪
Automatic Ignition Gas Torch



WK-1S

WK-1

WK-1D1

WK-3SW

WK-622 ▶

手动胀管器
Tube Expander

专利产品 PATENTED




用于 Use for:
6mm, 8mm, 9mm, 10mm, 12mm,
16mm, 19mm, 22mm, 1/4", 5/16",
3/8", 1/2", 5/8", 3/4", 7/8" O.D. Tubing

精准胀管 经久耐用

ACCURACY EXPANDING SUPER DURABLE

使用说明 Operation Guide



WK-96 ▶

胀管棒
Swaging Punch



用于 Use for:
1/4", 5/16", 3/8", 1/2", 5/8", 3/4" O.D. Tubing




制冷工具和真空泵专家



CT-100 ▶
杠杆胀管器工具箱
Lever Tube Expanding Tool Kit

杠杆胀管 方便快捷

LEVER EXPANDED FAST & CONVENIENT



产品技术参数 Technical Parameter

型号 Item No.	品名规格 Description
CT-100AL	CT-100A+WK-650 +CT-207 For inch: 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-5/8" O.D. Tubing
CT-100ML	CT-100M+WK-650 +CT-207 For metric: 10mm, 12mm, 16mm, 19mm, 22mm, 25mm, 28mm, 32mm, 35mm, 38mm, 42mm O.D. Tubing
CT-100A	CT-100A+WK-532 +CT-207 For inch: 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8" O.D. Tubing
CT-100M	CT-100M+WK-532 +CT-207 For metric: 10mm, 12mm, 16mm, 19mm, 22mm, 25mm, 28mm O.D. Tubing

新型自动定心式胀头
NEW Expander Heads



新型备用胀头 NEW Spare Expander Heads			
Inch	英制	Metric	公制
N100A-01	For inch: 3/8"	N100M-01	For metric: 10mm
N100A-02	For inch: 1/2"	N100M-02	For metric: 12mm
N100A-03	For inch: 5/8"	N100M-03	For metric: 16mm
N100A-04	For inch: 3/4"	N100M-04	For metric: 19mm
N100A-05	For inch: 7/8"	N100M-05	For metric: 22mm
N100A-06	For inch: 1"	N100M-06	For metric: 25mm
N100A-07	For inch: 1-1/8"	N100M-07	For metric: 28mm
N100A-08	For inch: 1-1/4"	N100M-08	For metric: 32mm
N100A-09	For inch: 1-3/8"	N100M-09	For metric: 35mm
N100A-10	For inch: 1-1/2"	N100M-10	For metric: 38mm
N100A-11	For inch: 1-5/8"	N100M-11	For metric: 42mm
N100A-12	For inch: 1-3/4"	N100M-12	For metric: 45mm
N100A-13	For inch: 2"	N100M-13	For metric: 50mm
N100A-14	For inch: 2-1/8"	N100M-14	For metric: 54mm
N100A-14"	For inch: 1/4"	N100M-14"	For metric: 6mm
N100A-5/16"	For inch: 5/16"	N100M-8mm	For metric: 8mm




CT-300 ▶

手动液压胀管器
Hydraulic Tube Expander

专利产品 PATENTED

操作示意图 Operation Guide



产品技术参数 Technical Parameter

型号 Item No.	品名规格 Description		
CT-300AL	CT-300A+WK-650+CT-209 +WK-207+CT-300PL	For inch: 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2", 1-5/8" O.D. Tubing	
CT-300ML	CT-300M+WK-650+CT-209 +WK-207+CT-300PL	For metric: 10mm, 12mm, 16mm, 19mm, 22mm, 25mm, 28mm, 32mm, 35mm, 38mm, 42mm O.D. Tubing	
CT-300A	CT-300A+WK-532+CT-209	For inch: 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8" O.D. Tubing	
CT-300M	CT-300M+WK-532+CT-209	For metric: 10mm, 12mm, 16mm, 19mm, 22mm, 25mm, 28mm O.D. Tubing	

WK-700 ▶

手动液压软管压接器

Hydraulic Hose Compressing Tools



专利产品 PATENTED

产品技术参数 Technical Parameter

型号 Item No.	品名规格 Description	
WK-700	WK-700+7 Pcs includes tablet compressing	#6, #8, #10, #12, #6SRB, #8SRB, #10SRB, #12SRB O.D. Tubing Packed in hand carrying plastic case. (收带手提箱包装)



压力压管 方便快捷

HEAVY DUTY COMPRESSING TOOLS
FAST & CONVENIENT

WK-400 ▶

液压扩管胀管工具

Hydraulic Expander & Flaring Tools

强力胀管 & 扩口
HEAVY DUTY
EXPANDING & FLARING



最大扩口: 22mm



夹管喉和夹头
Liners And Expander



液压胀管
Hydraulic Expander



液压扩管
Hydraulic Flare



标准胀管和扩口
Accurate Flaring & Expanding

产品技术参数 Technical Parameter

型号 Item No.	品名规格 Description	
WK-400AM-L	WK-400+WK-532 +CT-207+8 Pcs includes swage adapters +6 Pcs steel bar	3/16", 1/4", 6mm, 5/16", 3/8", 10mm, 1/2", 12mm, 5/8", 3/4", 7/8", 22mm O.D. Tubing Packed in hand carrying plastic case. (收带手提箱包装)

WK-N364-14

杠杆型弯管器
Lever Type Tube Bender

专利产品 PATENTED



易操作 完美弯管

EASY OPERATION PERFECT BENDING



手柄可360度调节
Two-stage design, easy effort



锁扣设计
Fixing hook locate the tube



弯管滚轮设计
Bender wheel



人体工学手柄设计
Ergonomic designed handle

★ Can be used for copper, aluminum, iron tubings (≤0.6pipe thickness) 可用于铜管、铝管、铁管(≤0.6壁厚)

产品技术参数 Technical Parameter

型 号 Item No.	规 格 Description
WK-N364A-06	use for 3/8" O.D.Tubing 用于3/8"外径的管子
WK-N364M-06	use for 10mm O.D.Tubing 用于10mm外径的管子
WK-N364A-08	use for 1/2" O.D.Tubing 用于1/2"外径的管子
WK-N364M-08	use for 12mm O.D.Tubing 用于12mm外径的管子
WK-N364-10	use for 5/8" & 16mm O.D.Tubing 用于5/8" & 16mm外径的管子
WK-N364-12	use for 3/4" & 19mm O.D.Tubing 用于3/4" & 19mm外径的管子
WK-N364-14	use for 7/8" & 22mm O.D.Tubing 用于7/8" & 22mm外径的管子

WK-1012-A


180° 2合1阶梯式新型专利两用弯管器
180° 2-in-1 Ladder Type Tube Bender



WK-1012-A-180° For 3/8" & 1/2" size O.D.Tubing
WK-1012-M-180° For 10mm & 12mm size O.D.Tubing

- ★ Aluminum alloy body
- ★ Bend radius 23mm For 3/8" (10mm) O.D.Tubing
- ★ Bend radius 35.8mm For 1/2" (12mm) O.D.Tubing
- ★ Open size-slips on tubing at any point, can bend 0.4mm thin tube without distortion.
- ★ Calibrated markings for making accurate left-hand, right-hand, and offset bends 180° start requires less effort.
- ★ Makes bending fast and easy.

- ★ 铝合金材料
- ★ 10mm(3/8")弯管的半径为: 23mm
- ★ 12mm(1/2")弯管的半径为: 35.8mm
- ★ 可以弯曲壁厚精确180° 的铜管
- ★ 可以弯曲到0.4mm的壁厚不变形
- ★ 实用新型专利和外观设计专利



采用人体工程学设计的防滑手柄
Ergonomic design skipproof handle



多台阶的梯式弯管槽
Multi stepped bender grooves



可验证管径尺寸的孔设计
Tube size testing design



对品不同规格的管径可移动式弯管钩设计
Removable hool design for multi tube sizes



WK-N368-180°

180° 3-in-1 TUBE BENDER

- 180° 3合1新型三用弯管器6mm, 8mm, 10mm
- ★ For 1/4", 5/16" & 3/8" size O.D.Tubing
- ★ Aluminum alloy body/Bend radius 15/16"(24mm).
- ★ 弯管半径为: 15/16"(24mm).



WK-N268-180°

180° 2-in-1 TUBE BENDER

- 180° 2合1新型两用弯管器6mm, 8mm
- ★ For 1/4" & 5/16" size O.D.Tubing
- ★ Aluminum alloy body/Bend radius 11/16"(17.5mm).
- ★ 弯管半径为: 11/16"(17.5mm).

WK-666 ▶

90° 组合手动弯管套装 90° Multi Bender Kit



品名规格 Description		特点 Feature
For 5mm, 6mm, 8mm, 10mm, 12mm, 1/4", 5/16", 3/8" & 1/2" O.D. Tubing	In blow-mold carrying case. Aluminum alloy wheel (铝轮)	★ 专为小管径设计 ★ 适用于空调制冷、环境控制、供油、汽车、液压和气压系统。 ★ 节约购买的储存预弯管的费用 ★ 人体工程学设计适用于单手操作 ★ 紧凑设计可在受限空间弯管 ★ 可弯壁厚为0.4mm的薄管

反弯管 Reverse Bending



CT-999F



CT-999R

型号 Item No.	品名规格 Description	
CT-999	CT-999+WK-532+CT-207	For Inch: 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8" O.D. Tubing. For Metric: 6, 8, 10, 12, 16, 19, 22mm O.D. Tubing.
CT-999R	CT-999+WK-532+CT-207	For Inch: 3/8", 1/2", 5/8", 3/4", 7/8" O.D. Tubing. For Metric: 10, 12, 16, 19, 22mm O.D. Tubing.
CT-999F	CT-999F+WK-532+CT-207	For Inch: 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8" O.D. Tubing. For Metric: 6, 8, 10, 12, 16, 19, 22mm O.D. Tubing.
CT-999RF	CT-999F+WK-532+CT-207	For Inch: 3/8", 1/2", 5/8", 3/4", 7/8" O.D. Tubing. For Metric: 10, 12, 16, 19, 22mm O.D. Tubing.

WK-R999 ▶

90° 组合手动弯管套装 90° Multi Bender Kit



吹塑盒包装 Plastic box



反弯管功能
Reverse bending

品名	规格 Description	
WK-R999+CT-207	For Inch: 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 7/8" O.D. Tubing For Metric: 6, 8, 10, 12, 16, 19, 22mm O.D. Tubing	In blow-mold carrying case. Aluminum wheel

多用弯管器 Tube Bender 3-in-1 & 4-in-1



CT-369-FHA-180°
For Inch: 3/16", 1/4", 5/16" & 3/8" O.D. Tubing



CT-368-90°
For Inch: 1/4", 5/16" & 3/8" O.D. Tubing

弯管器 Tube Bender

型号 Item No.	用于 Size For	弯管半径 Bend Radius
CT-364A-06	3/8"	23mm
CT-364A-08	1/2"	35.8mm
CT-364M-08	12mm	35.8mm
CT-364-10	16mm & 5/8"	54.4mm
CT-364-12	19mm & 3/4"	75.3mm
CT-364-14	22mm & 7/8"	82.1mm



CT-364-06/08



CT-364-10/12/14

RLD-382P ►

制冷剂检漏仪

Refrigerant Gas Leak Detector

FEATURES:

Refrigerant Leak Detector is a perfect tool for maintaining the air-condition or a cooling system with compressor and Refrigerant.

This unit uses a newly developed semi-conductor sensor which is extremely sensitive for variety of general used Refrigerant.

功能特点:

制冷剂检漏仪是非常好的空调及带制冷剂、压缩机的制冷系统维修工具。此产品所采用的最新开发的半导体探头对各种常用制冷剂非常灵敏。

Sensitivity:

Refrigerant	H	M	L
R-22,134a	3g/year	15g/year	30g/year
R-404A,407C,410A	4g/year	20g/year	40g/year



7 LED MULTI COLOR VISUAL DISPLAY.

Enables user to pinpoint exact location of leak



Low Sensitivity Level(Green LED)



Medium Sensitivity Level(Orange LED)



High Sensitivity Level(Red LED)

产品技术参数 Technical Parameter

Alarm Method	Buzzer,Tricolor LED Bar Indicator	Disable Auto Power OFF	Press "ON/OFF" button then power on the meter
Power Usage	4 AA size(5V DC) Alkaline Batteries	Warm-Up Time	Approximately 45 seconds
Flexible probe length	40cm(15.5")	Operating Temperature & Humidity	0 ~ 40°C, <80%RH
Dimension/Weight	173x66x56mm(approximately 400g)	Storage Temperature & Humidity	-10 ~ 60°C, <70%RH
Battery Life	Approximately 7 hours normal use	Detectable Gases	CFCs:R11,R12,R13; HCFCs:R22,R502,R500; HFCs:R134a,R123,R125,R23, R404A,R407C,R410A and other halogen based compounds
Auto Power OFF	10 minutes		
Altitude	<2000M(6500')		

卤素检漏仪 ►

Refrigerant Gas Leak Detector



CT-CPU06

DSA-200



产品技术参数 Technical Parameter

型号 Item No.	DSA-200	CT-CPU05	CT-CPU06
Dimensions	17cm × 6cm × 3.8cm	22.9cm × 6.5cm × 6.5cm	22.9cm × 6.5cm × 6.5cm
Batteries	2 × 1.5V AA Alkaline Batteries(3 VDC)		
Battery Life	40 hours		
Sensitivity	<3g/year(0.1 oz/yr)		
Sensor lifetime	approx. 30 hours		
Operating temperature	32~122°F(0~50°C)		
Warm up time	<2 sec.	<10 sec.	<2 sec.
Response time	instantaneous		
Reset time	instantaneous		
Probe length	12"(30cm)	14"(33.5cm)	12"(30cm)

WK-RF100 ▶

无线冷媒加注秤
Wireless Charging Scale



超大流量 定量加注

Extra-Large Flow Quantity Charging



NOTE: To prevent damage, never exceed the rated capacity of the scale.

大流量可编程加注回收所有冷媒，精确度高，适用于汽车空调、商用空调、冷库等制冷机冷媒加注。



产品技术参数 Technical Parameter

ITEM	WK-RF100
最大称重能力 Capacity	100KG/220LB/220L.B.00.OZ
单位转换 Units	KG/LB/OZ/LB+OZ
精确度 Accuracy	0.05% Of Reading ± 1 Least
分辨率 Resolution	Low Accuracy $\pm 5g$; High Accuracy $\pm 2g$
秤盘的尺寸 Platform Size	33.5 $\times$ 31.5 $\times$ 7.5cm
使用电压 Power	6 $\times$ 1.5V Alkaline Battery (7.5V DC $\pm$ 9VX)
电池寿命 Battery Life	60 Hours Continuous Use
使用温度 Operation Temperature	10°C $\sim$ 50°C (50°F $\sim$ 122°F)
重量 Weight	3.7KG (8.16 LB)



RCS-N9030 ▶

大流量可编程冷媒加注秤
Large Flow Programmable
Charging Scale




超大流量 定量加注

Extra-Large Flow Quantity Charging



NOTE: To prevent damage, never exceed the rated capacity of the scale.

大流量可编程加注回收所有冷媒，精确度高(100公斤5克精度)自动关闭、自动报警功能。适用于汽车空调、商用空调、冷库等制冷机冷媒加注。

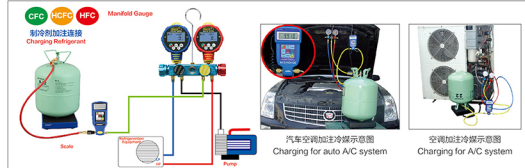


ITEM	RCS-N50A	RCS-N9030
最大称重能力 Capacity	50KG/110LB/110L.B.00.OZ	100KG/220LB/220L.B.00.OZ
单位转换 Units	KG/LB/OZ	KG/LB/OZ
精确度 Accuracy	0.02% Of Reading ± 1 Least	0.05% Of Reading ± 1 Least
分辨率 Resolution	± 0.07 OZ/2G	± 0.25 OZ/5G
样盘的尺寸 Platform Size	8-3/4" $\times$ 8-3/4" 223 $\times$ 223mm	
使用电压 Power	5 $\times$ 1.5V Alkaline Battery (7.5V DC)	
电池寿命 Battery Life	60 Hours Continuous Use	
使用温度 Operation Temperature	10°C $\sim$ 50°C (50°F $\sim$ 122°F)	
重量 Weight	2.74KG (6.03 LB)	



RCS-7040

普通冷媒计重秤

Electronic Refrigerant Charging Scale



NOTE: To prevent damage, never exceed the rated capacity of the SCALE.

ITEM	RCS-50	RCS-7040
液晶显示屏 LCD Display		 三种单位可选(公制/英制/盎司), 公升/磅/盎司(LB/OZ) 液晶显示屏尺寸(LCD Size): 67mm x 23mm 显示屏: 7位显示 (7 Digits Display)
称量范围 Range of weight	0-50KG or 0-110 LB or 0 LB 00.00 OZ-110 LB 00.00 OZ	0-100KG or 0-220 LB or 0 LB 00.00 OZ-220 LB 00.00 OZ
精确性 Accuracy	0.02% of reading	0.05% of reading
分辨率 Resolution	± 2g/0.006 LB/0.08 OZ	± 5g/0.01 LB/0.25 OZ
单位 Unit	KG/LB/OZ (公斤/英镑/盎司)	
电源 Power supply	9V DC (直流9V)	
使用温度 Operating temp	32°F-113°F (0°C-45°C)	
秤盘尺寸 Platform size	8-3/4" x 8-3/4" 223 x 223mm	
电池寿命 Battery life	30 Hours Continuous Use	
重量 Weight	2.485KG (5.47 LB)	

WK-VG89

数显可编辑真空计

Digital Vacuum Meter

LCD大屏
LCD Screen

开关
ON/OFF

单位切换
Units

背光灯
Background Light

高精度传感器
High Accuracy Sensor



特点:

1. 精准监测系统真空度。
2. 检测真空气密性。
3. 校准智能真空泵的真空计。

FEATURE:

1. Monitor system vacuum.
2. Monitor vacuum pump air impermeability.
3. Calibrate vacuum gauge on intelligent pump.

ITEM	WK-VG89
量程 Range	1ATM(approximately 100000Pa)-0.1Pa, 750000-0.75Micron
测量精度 Accuracy	0.1Pa-1000Pa; Reading ± 5% (at 20°C)
分辨率 Resolution	0.1Pa (<10Pa); 1Pa (<100Pa); 10Pa (<1000Pa)
单位选择 Unit	Pa, mBar, mmHg, mTorr, inHg, Microns
电源 Battery life	40 hours (4 × AA battery)
最大过载压力 Maximum overload pressure	0.5MPa/72PSI
操作温度 Operating temperature	-5~50°C (-23~122°F)
蜂鸣器 Buzzer alarm	90分贝音量, 10S后关闭(90db, shut down after 10 seconds)

Spare Parts & Accessories For WK-VG89



WKT48

WKT87

Adapter for WK-VG89, 1/4" SAE male to 1/2"~20 male to 1/2"~20 sealed female tee
外螺纹 1/4" SAE, 外螺纹 1/2" SAE, 内螺纹 1/2" SAE.


WKT48

Adapter for WK-VG89, 1/4" SAE male to 1/2" ACME male to 1/4" SAE sealed female tee
外螺纹 1/4" SAE, 外螺纹 1/2" ACME, 内螺纹 1/4" SAE.

WKT45

Adapter for WK-VG89, 1/4" SAE male to 1/4" SAE male to 1/4" SAE sealed female tee
外螺纹 1/4" SAE, 外螺纹 1/4" SAE, 内螺纹 1/4" SAE.

真空表 Vacuum Meter



WK-18VG

Vacuum meter 1000 to 0 mbar
Diameter: 3"-10"
Connector: 1/8" NPT Male connection
With max-reading gauge pointer
Indicates maximum pressure reading
attained during any given period
Readjust with thumb screw

真空表 1000到0毫巴
直径: 3-10英寸
连接: 1/8英寸NPT公制接口
配有最大读数表盘指针
指示任一给定期间所达到的最大压力读数
可以随压力调整零位



制冷剂压力及真空压强两用数显表 Digital Pressure Vacuum Gauge

Feature

- Pressure and vacuum gauge shift function
- Real-time vacuum pressure test and percent indicate
- Low power indicates Batteries life 30h/9v
- Pressure unit: Kpa, Bar, Psi, Torr, Kg/cm², inHg, mmHg
- Temperature units: °F, °C
- Test range UAC: URC: -101 Kpa~6Mpa
R00C: -101 Kpa~6Mpa
For WK688L, WK688H
- Resolution: 1Kpa
- Accuracy: ±0.5%
- Overload: 1000bar, 10Mpa
- Operating temp: -20°C ~ 60°C

产品特点

- 冷暖泵和真空切换功能
- 实时真空压力并以百分比指示真空度
- 电池电量指示, 电池使用寿命为30-90h, 9v电池
- 测量单位为Kpa, Bar, Psi, Torr, Kg/cm², inHg, mmHg
- 温度单位: °F, °C
- 测量范围 UAC: URC: -101 Kpa~6Mpa
R00C: -101 Kpa~6Mpa
适用于 WK688L, WK688H
- 最小精度: 1Kpa
- 准确度: ±0.5%
- 过载能力: 1000bar, 10Mpa
- 适用温度: -20°C ~ 60°C

数显单表结构图 Digital Gauge Frame Drawing

WK-688L

1. Refrigerants Select**
2. Holdfast select
3. 制冷剂选择键
4. 长按快退

Power ON/OFF
电源开关键

1. Press to "ZERO"
2. Default Refrigerants Status Hold 2Sec Vacuum Status
1. 屏幕清零键
2. 长按两秒2秒切换到真空模式



Default Refrigerants Status 制冷剂模式



URC = Vacuum 0.00%
Vacuum pressure percent indicate

Hold 2 Sec Vacuum Status 真空模式



LCD Display
LCD液晶屏

1. Pressure/Temperatures Units
2. 2 sec Background Light ON/OFF
1. 压力单位选择键
2. 长按2秒背景光源开关

1. Refrigerants Select**
2. Holdfast select
1. 制冷剂选择键
2. 长按快退

高精度压力传感器
Pressure sensor

WK-688H

序号 Unit	WK-688L Unit Refrigerant (制冷剂)	序号 Unit	WK-688H Unit Refrigerant (制冷剂)	序号 Unit	WK-688L Unit Refrigerant (制冷剂)	序号 Unit	WK-688H Unit Refrigerant (制冷剂)	序号 Unit	WK-688L Unit Refrigerant (制冷剂)	序号 Unit	WK-688H Unit Refrigerant (制冷剂)
1	R11	22	R290	43	R410B-LQ	64	R424A-LQ	70	R502-LQ	71	R502-LQ
2	R113	23	R32	44	R411A-LQ	65	R425A-LQ	72	R503-LQ	73	R503-LQ
3	R114	24	R404A-LQ	45	R411B-LQ	66	R426A-LQ	74	R504-LQ	75	R504-LQ
4	R115	25	R408B-LQ	46	R412A-LQ	67	R427A-LQ	76	R505A-LQ	77	R505A-LQ
5	R116	26	R409C-LQ	47	R413A-LQ	68	R428A-LQ	78	R506A-LQ	79	R506A-LQ
6	R12	27	R409A-LQ	48	R414A-LQ	69	R507A-LQ	80	R507A-LQ	81	R507A-LQ
7	R123	28	R409B-LQ	49	R414B-LQ	70	R508A-LQ	82	R508A-LQ	83	R508A-LQ
8	R124	29	R409A-LQ	50	R415A-LQ	71	R509A-LQ	84	R509A-LQ	85	R509A-LQ
9	R125	30	R409B-LQ	51	R416A-LQ	72	R510A-LQ	86	R510A-LQ	87	R510A-LQ
10	R13	31	R409A-LQ	52	R416A-LQ	73	R511A-LQ	88	R511A-LQ	89	R511A-LQ
11	R134a	32	R409A-LQ	53	R417A-LQ	74	R512A-LQ	89	R512A-LQ	90	R512A-LQ
12	R14	33	R409A-LQ	54	R418A-LQ	75	R513A-LQ	90	R513A-LQ	91	R513A-LQ
13	R141B	34	R407A-LQ	55	R419A-LQ	76	R514A-LQ	91	R514A-LQ	92	R514A-LQ
14	R142B	35	R407B-LQ	56	R420A-LQ	77	R515A-LQ	92	R515A-LQ	93	R515A-LQ
15	R143A	36	R407C-LQ	57	R421A-LQ	78	R516A-LQ	93	R516A-LQ	94	R516A-LQ
16	R152A	37	R407D-LQ	58	R422B-LQ	79	R517A-LQ	94	R517A-LQ	95	R517A-LQ
17	R170	38	R409A-LQ	59	R422A-LQ	80	R518A-LQ	95	R518A-LQ	96	R518A-LQ
18	R21	39	R409A-LQ	60	R423B-LQ	81	R519A-LQ	96	R519A-LQ	97	R519A-LQ
19	R218	40	R409B-LQ	61	R423C-LQ	82	R520A-LQ	97	R520A-LQ	98	R520A-LQ
20	R22	41	R41	62	R423D-LQ	83	R521A-LQ	98	R521A-LQ	99	R521A-LQ
21	R23	42	R410A-LQ	63	R423A-LQ	84	R522A-LQ	99	R522A-LQ	100	R522A-LQ



WK-6881L

数显表阀 Digital Manifolds



WK-6882

多功能 超高精度 MULTI FUNCTION SUPERHIGH ACCURACY



WK-6881H



WK-6882-L



WK-6884-L

型号 Model	管长 Pipe Length	管长 Size of Hose	规格 Description
WK-6881H	36"	36"(90cm)	Single Digital manifolds +2Pcs of charging hose. Working pressure: 800 PSI/Burst 4000PSI +1Pcs of 9V Battery +1Pcs of Adapter AD-89 +1Pcs of suitcase.
WK-6881L	60"	60"(150cm)	Single Digital manifolds +2Pcs of charging hose. Working pressure: 800 PSI/Burst 4000PSI +1Pcs of 9V Battery +1Pcs of Adapter AD-89 +1Pcs of suitcase.
WK-6882-L	60"	60"(150cm)	2-Valve Digital manifolds +3Pcs of charging hose. Working pressure: 800 PSI/Burst 4000PSI +2Pcs of 9V Battery +2Pcs of Adapter AD-89 +1Pcs of suitcase.
WK-6884-L	60"	60"(150cm)	4-Valve Digital manifolds +4Pcs of charging hose. Working pressure: 800 PSI/Burst 4000PSI +2Pcs of 9V Battery +2Pcs of Adapter AD-89 +1Pcs of suitcase.

WK-6889-L

数显表阀 Digital Manifolds

80多种制冷剂可选, 包括R1234YF, R32, R600A
OVER 80 REFRIGERANTS INCLUDE
R1234YF, R32, R600A

高亮LCD显示屏
HIGH DEFINITION LCD SCREEN

高感橡胶按键
TEXTURE SOFT RUBBER BUTTON



铂电阻温度传感器

1/4英寸标准接口
1/4"SAE BRASS CONNECTION

BATTERY LEVEL INDICATOR

精确显示饱和温度
ACCURATE DISPLAY SATURATION TEMPERATURE

精确显示过冷/热度
ACCURATE DISPLAY SUPER
HEAT AND SUBCOOL

橡胶式阀门/锁闭开关
TEXTURE DIAPHRAGM VALVE/LOCK



WK-6889-L

型号 Item No.	管子长度 Size Of Hose	规格 Description
WK-6889-L	60"(150cm)	2Valve Digital manifolds+3 Pcs of charging hose, Working pressure, 800 PSI, Burst 4000 PSI+5 Pcs of 1.5V Battery+2 Pcs of temperature sensor+2 Pcs of Adapter AD-89+1 Pcs of suitcase, 2阀数显表+3根加液管, 工作压力800PSI, 爆破压力4000PSI+5块1.5V电池+2根型铂电阻温度传感器+2只橡胶接头AD-89+1只手提箱

WK-C3602B

双阀表组 2-Valve Testing Manifolds

80mm 1.6级高精度密封承压压力表
高压0 To 550Psi-30 To 0 InHg
高压0 To 760Psi-30 To 0 InHg

质地护套
TEXTURE PROTECTOR

指针校准孔
CALIBRATION HOLE

表盘可任意定制
CUSTOMIZABLE SCALE

升级版 铝合金手轮
UPGRADED ALUMINUM ALLOY HANDWHEEL

1/4英寸标准接口
1/4"SAE BRASS CONNECTION


高精度 超防震

HIGH ACCURACY SUPER SHOCK PROOF

MANIFOLD GAUGE	Diameter Of Gauge (60mm/表盘直径)	Diameter Of Gauge (80mm/表盘直径)	Gauge Scale (表头刻度)	Size Of Hose (管子长度)	Description (规格)
WK-C3601S	WK-C3601S	WK-C3601B	R22	36" (90cm)	3pcs charging hoses, Working pressure 600PSI Burst 3000PSI. A sight glass brass/aluminum body. Designed to meet 1/4" SAE. 红、黄、蓝三色加液管, 工作压力600PSI爆破压力3000PSI, 带玻璃视窗铝/铜体, 接头尺寸1/4"SAE.
	WK-C6001S	WK-C6001B	R404A	60" (150cm)	
	WK-C7201S	WK-C7201B	R134a	72" (180cm)	
WK-C3601B	WK-C3602S	WK-C3602B	R22	36" (90cm)	3pcs charging hoses, Working pressure 800PSI Burst 4000PSI. A sight glass brass/aluminum body. With 2PCS adapter AD-89. Designed to meet 1/4" SAE. 红、黄、蓝三色加液管, 工作压力800PSI爆破压力4000PSI, 带玻璃视窗铝/铜体, 接头尺寸1/4"SAE.
	WK-C6002S	WK-C6002B	R404A	60" (150cm)	
	WK-C7202S	WK-C7202B	R407C	72" (180cm)	
WK-C3601B	WK-C3603S	WK-C3603B	R22	36" (90cm)	3pcs red, yellow & blue charging hoses, Working pressure 500PSI Burst 2500PSI. A sight glass brass/aluminum body. Designed to meet 1/4" SAE. 红、黄、蓝三色加液管, 工作压力500PSI爆破压力2500PSI, 带玻璃视窗铝/铜体, 接头尺寸1/4"SAE.
	WK-C6003S	WK-C6003B	R134a	60" (150cm)	
	WK-C7203S	WK-C7203B	R404A	72" (180cm)	

WK-P3602S

双阀表组 2-Valve Testing Manifolds

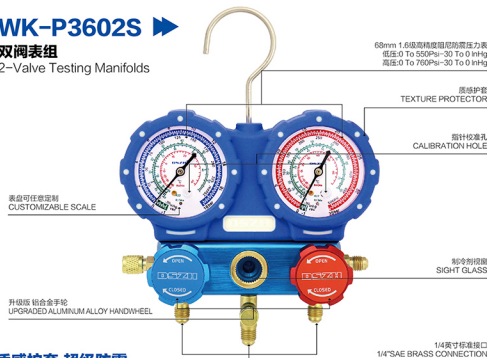

质感护套 超级防震

TEXTURE PROTECTOR & SUPER SHOCK PROOF

	Diameter Of Gauge 68mm(表盘直径)	Diameter Of Gauge 80mm(表盘直径)	Gauge Scale (表头刻度)	Size Of Hose (管子长度)	Description (规格)
	WK-P3601S	WK-P3601B	R134a	36" (90cm)	3pcs charging hoses, Working pressure 600PSI Burst 3000PSI. A sight glass brass/aluminum body. With QC-19L/19L. Designed to meet 14" SAE. 红、黄、蓝三根加液管，工作压力 600PSI 爆破压力 3000PSI，带视窗铝/铜主体，接头尺寸 14" SAE，带 QC-19L 万向加液接头。
	WK-P6001S	WK-P6001B		60" (150cm)	
	WK-P7201S	WK-P7201B		72" (180cm)	

	Diameter Of Gauge 68mm(表盘直径)	Diameter Of Gauge 80mm(表盘直径)	Gauge Scale (表头刻度)	Size Of Hose (管子长度)	Description (规格)
	WK-P3602S	WK-P3602B	R22 R404A R410A R407C	36" (90cm)	3pcs charging hoses, Working pressure 800PSI Burst 4000PSI. A sight glass brass/aluminum body. With 2PCS adapter AD-69. Designed to meet 14" SAE. 红、黄、蓝三根加液管，工作压力 800PSI 爆破压力 4000PSI，带视窗铝/铜主体，接头尺寸 14" SAE。
	WK-P6002S	WK-P6002B		60" (150cm)	
	WK-P7202S	WK-P7202B		72" (180cm)	

	Diameter Of Gauge 68mm(表盘直径)	Diameter Of Gauge 80mm(表盘直径)	Gauge Scale (表头刻度)	Size Of Hose (管子长度)	Description (规格)
	WK-P3603S	WK-P3603B	R22 R134a R404A	36" (90cm)	3pcs red, yellow & blue charging hoses. Working pressure 500PSI Burst 2500PSI. A sight glass brass/aluminum body. Designed to meet 14" SAE. 红、黄、蓝三根加液管，工作压力 500PSI 爆破压力 2500PSI，带视窗铝/铜主体，接头尺寸 14" SAE。
	WK-P6003S	WK-P6003B		60" (150cm)	
	WK-P7203S	WK-P7203B		72" (180cm)	

单表阀

Single Gauge Valve



WK-466H
WK-466L



WK-467-GL
WK-467-GH



WK-468-GL
WK-468-GH

铜架表组 Brass Testing Manifolds

	Item No. 型号	Size Of Hose 管子长度
	WK-536G-R22	36" (90cm)
	WK-560G-R22	60" (150cm)
	WK-536G-R134a	36" (90cm)
	WK-560G-R134a	60" (150cm)
	WK-536G-R410A	36" (90cm)
	WK-560G-R410A	60" (150cm)

双阀表组 2-Valve Testing Manifolds

	Item No. 型号
	CT-136G-R22
	CT-160G-R22
	CT-236G-R134a
	CT-260G-R134a
	CT-336G-R410A
	CT-360G-R410A

四阀表组 4-Valve Testing Manifolds

	Item No. 型号	Size Of Hose 管子长度
	CT-436G-R22	36" (90cm)
	CT-460G-R22	60" (150cm)
	CT-736G-R134a	36" (90cm)
	CT-760G-R134a	60" (150cm)
	CT-836G-R410A	36" (90cm)
	CT-860G-R410A	60" (150cm)

便携式表组 Manifolds With Hand-Carry Plastic Case

	Item No. 型号	Size Of Hose 管子长度
	CT-MC236G-R134a	36" (90cm)
	CT-MC260G-R134a	60" (150cm)
	CT-MC272G-R134a	72" (180cm)


WK 3.5"/80mm Pressure Gauges & Liquid Filled Gauges



Item No.	WK-8001L/H	WK-8002L/H	WK-8003L/H	WK-RG80L/H	WK-RG81L/H	WK-RG82L/H
Refr.Scales	R407C,R134a, R22,R410A	R407C,R404A, R22,R410A	R12,R22, R134a	R404A,R22, R134a,R410A	R404A,R22, R134a,R410A	R410A
Rres.&Temp. Scales	Psi,Bar,°C	Bar,Psi,°C	Bar,Psi,°C	Psi,KPa,°C Oil Filled	Psi,KPa,°C Oil Filled	Psi,KPa,°C Oil Filled

Item No.	WK-8004L/H	WK-8005L/H	WK-8006L/H	WK-8007L/H	WK-8008L/H
Refr.Scales	R410A,R32, R22,R134a	R404A,R22, R134a	R410A,R407C, R32,R134a	R410A,R407C, R32	R410A,R32, R22,R134a
Rres.&Temp. Scales	Bar,Psi,°C	Bar,Psi,°C	Psi,Bar,°C	Psi,Bar,°C	Bar,Psi,°C

WK 2.5"/68mm Pressure Gauges



Item No.	WK-6801L/H	WK-6802L/H	WK-6803L/H	WK-6804L/H	WK-6805L/H	WK-6806L/H
Refr.Scales	R410A	R22,R404A, R407C,R410A	R22,R404A, R134a	R410A,R32, R22,R134a	R22,R134a, R404A,R407C	R1234YF, R22,R134a
Rres.&Temp. Scales	KPa,Psi,°C,°F	Bar,Psi,°C	KPa,Psi,°C	Bar,Psi,°C	KPa,Psi,°C	KPa,Psi,°C

Item No.	WK-6807L/H	WK-6808L/H	WK-6809L/H	WK-6810L/H	WK-6811L/H
Refr.Scales	R12,R22, R502,R134a	R404A,R410A, R22,R134a	R22,R404A, R407C	R134a	R600
Rres.&Temp. Scales	Kg/cm²,Psi,°C	Psi,Bar,°C	Bar,Psi,°C	Psi,°C,°F	Bar,Psi,°C,°F

Item No.	WK-6812L/H	WK-6813L/H	WK-6814L/H	WK-6815L/H	WK-6816L/H
Refr.Scales	R22,R404A, R410A	R22,R134a,R404A, R407C,R410A	R410A,R407C, R32,R134a	R410A,R407C, R32	R410A,R32, R22,R134a
Rres.&Temp. Scales	Psi,°F	Bar,Psi,°C	Psi,Bar,°C	Psi,Bar,°C	Psi,Bar,°C

Rubber Boots

橡胶保护套

WK-68LG/68HG
WK-80LG/80HG



68LG/HG & 80LG/HG Rubber Boots
For standard 68mm & 80mm gauges



For R12 R22 & R502

R12 R22 & R502 Standard Charging Hose

R12 R22 & R502 标准加液管

CT-336-RYB 3 pcs 36"(90cm)red,yellow & blue hoses sets
CT-360-RYB 3 pcs 60"(150cm)red,yellow & blue hoses sets
CT-372-RYB 3 pcs 72"(180cm)red,yellow & blue hoses sets
Working Pressure 500PSI Burst 2500PSI.
Designed to meet 1/4"SAE requirement for refrigerant permutation and assure long work life.
最大的工作压力为500PSI, 最大爆破压力为2500PSI.
1/4"SAE的接头, 该优质管能确保长时间的工作寿命。

R134 Premium Charging Hose With 1/4"SAE Fittings

R134 优质软管1/4"SAE


CT-336-RYB-P 3 pcs 36"(90cm)red,yellow & blue hoses sets
CT-360-RYB-P 3 pcs 60"(150cm)red,yellow & blue hoses sets
CT-372-RYB-P 3 pcs 72"(180cm)red,yellow & blue hoses sets
Working Pressure 600PSI Burst 3000PSI.
Designed to meet 1/4"SAE requirement for refrigerant permutation and assure long work life.
最大的工作压力为600PSI, 最大爆破压力为3000PSI.
1/4"SAE的接头, 该优质管能确保长时间的工作寿命。



R410 High Pressure Charging Hose

R410 高压软管5/16"SAE

CT-336-RYB-H 3 pcs 36"(90cm)red,yellow & blue hoses sets
CT-360-RYB-H 3 pcs 60"(150cm)red,yellow & blue hoses sets
CT-372-RYB-H 3 pcs 72"(180cm)red,yellow & blue hoses sets
Special material high pressure Charging hose.
Working pressure 800PSI Burst 4000PSI.
All the hoses with 1/4"SAE, 5/16"SAE connections are optional.
特殊材质能够耐高压的软管。
最大的工作压力为800PSI, 最大爆破压力为4000PSI。
所有软管可提供1/4"SAE、5/16"SAE的接头。



R410 High Pressure Charging Hose With Ball Valve

R410 带球阀高压管接头


R410-RV For red hose with ball valve
R410-YY For yellow hose with ball valve
R410-BV For blue hose with ball valve
Special material high pressure Charging hose.
Working pressure 800PSI Burst 4000PSI.
All the hoses with 1/4"SAE, 5/16"SAE connections are optional.
特殊材质能够耐高压的软管。
最大的工作压力为800PSI, 最大爆破压力为4000PSI。
所有软管可提供1/4"SAE、5/16"SAE的接头。



R410 High Pressure Charging Hose With Ball Valve

R410 带球阀高压管5/16"SAE

CT-336-RYB-HV 3 pcs 36"(90cm)red,yellow & blue hoses sets with shut-off ball valve
CT-360-RYB-HV 3 pcs 60"(150cm)red,yellow & blue hoses sets with shut-off ball valve
CT-372-RYB-HV 3 pcs 72"(180cm)red,yellow & blue hoses sets with shut-off ball valve
Special material high pressure Charging hose.
Working pressure 800PSI Burst 4000PSI.
All the hoses with 1/4"SAE, 5/16"SAE connections are optional.
特殊材质能够耐高压的软管。
最大的工作压力为800PSI, 最大爆破压力为4000PSI。
所有软管可提供1/4"SAE、5/16"SAE的接头。



CT-336-RYB-HV

可调式快速接头 R134a Adjustable Quick Couplers

Item No.	Description		
QC18-L	Low side × 1/4" male 90°		
QC18-H	High side × 1/4" male 90°		
QC19-L	Low side × 1/4" male & female 90°		
QC19-H	High side × 1/4" male & female 90°		

快速接头 R134a Quick Couplers

Item No.	Colour	Description	
QC12-L	Blue	Low side × 1/4" male flare straight	
QC12-H	Red	High side × 1/4" male flare straight	
QC15-L	Blue	Low side × 1/4" male flare 90°	
QC15-H	Red	High side × 1/4" male flare 90°	

带阀芯转换接头 Brass Adapters

Item No.	Female	Male	Other	Application
AD-78	1/2"-20 UNF(5/16"SAE)	1/4"SAE	W/core & Depressor	R-410A International
AD-87	1/4"SAE	1/2"-20 UNF(5/16"SAE)	W/core & Depressor	R-410A International
AD-89	1/2"-20 UNF(5/16"SAE)	1/4"SAE	W/core & Depressor	R-410A International
AD-98	1/4"SAE	1/2"-20 UNF(5/16"SAE)	W/core & Depressor	R-410A International

球阀 Ball Valves

Item No.	Female 内螺纹	Male 外螺纹
BV01	1/4"SAE	1/4"SAE
BV02	1/4"SAE	1/2"-20 UNF(5/16"SAE)
BV03	1/2"-20 UNF(5/16"SAE)	1/4"SAE
BV04	1/2"-20 UNF(5/16"SAE)	1/2"-20 UNF(5/16"SAE)
BV901	1/4"SAE 90°	1/4"SAE
BV902	1/4"SAE 90°	1/2"-20 UNF(5/16"SAE)
BV903	1/2"-20 UNF(5/16"SAE)90°	1/4"SAE
BV904	1/2"-20 UNF(5/16"SAE)90°	1/2"-20 UNF(5/16"SAE)
BV451	1/4"SAE 45°	1/4"SAE
BV452	1/4"SAE 45°	1/2"-20 UNF(5/16"SAE)
BV453	1/2"-20 UNF(5/16"SAE)45°	1/4"SAE
BV454	1/2"-20 UNF(5/16"SAE)45°	1/2"-20 UNF(5/16"SAE)
BVM01	1/2"-20 UNF(5/16"SAE) × 2	1/4"SAE × 2
BVM02	1/2"-20 UNF(5/16"SAE) × 2	1/2"-20 UNF(5/16"SAE) × 2
BVM03	1/4"SAE-1/2"-20 UNF(5/16"SAE)	

全系列智能真空泵 All Series Intelligent Vacuum Pumps



安全 智能 防爆，无火花
无刷变频

高效 轻便 超快抽速
重量轻，便于携带和运输

Safety explosion-proof and sparkless.

Efficient ultra-fast pumping speed.

Intelligent brushless and variable frequency.

Portable light weight, easy to carry and transport.

智能迷你真空泵 ▶

Intelligent Mini Vacuum Pump

专利产品 PATENTED

特点 Feature

- ★采用无刷直流电机。
- ★适用于R32等所有冷媒。
- ★体积小，重量轻，抽气速度快。
- ★Brushless DC motor.
- ★Suitable for all refrigerants such as R32.
- ★Small volume, light weight, fast pumping.



型号 Item No.	WK-M2BM	WK-M2S
速率 Flow Rate	2.5 CFM 70 L/MIN	2.5 CFM 70 L/MIN
级数 Pole No.	双级 Dual Stages	单级 Single Stage
极限真空 Ultimate Vac.	2x10 ⁻¹ Pa 15 microns	2 Pa 60 microns
功率 Power	1/4 HP	1/4 HP
接口 Inlet Port	1/4" flare	1/4" flare
润滑油量 Oil Capacity	200 ml	260 ml
外形尺寸 Dimension	270x167x244 mm	270x167x244 mm
净重 Weight	3.3 kgs	2.8 kgs



◀ WK-C2BM

锂电真空泵
Cordless Vacuum Pump

专利产品 PATENTED

特点 Feature

- ★适用于R32等所有冷媒。
- ★适用于无交流电的场合使用。
- ★体积小，重量轻，抽气速度快。
- ★Suitable for all refrigerants such as R32.
- ★Suitable for occasions without AC power.
- ★Small volume, light weight, fast pumping.

WK-C4BM ▶

锂电真空泵
Cordless Vacuum Pump

suit for
R32



特点

- | | | | |
|---|---|---|---------------------------|
| 整体双缸结构
超高气速性
密封系统严密，免受油的污染 | 内置智能控制阀
智能防回流
制冷系统停机后，免受油的污染 | 智能电机
功率强劲，可在-1℃环境中正常启动
采用无刷变频电机，适用于R32、R600
等所有冷媒 | 嵌入式真空表
精准、直观、方便 |
|---|---|---|---------------------------|

FEATURE

- | | | | |
|---|--|---|---|
| Overall Double Steel Structure
Ultra-high tightness.
Higher ultimate vacuum. | Built-in intelligent control valve
Intelligent anti-reflux.
Avoid oil contamination When the refrigeration system is shut down. | Intelligent Motor
Powerful, easy to start in -1℃ environment.
Brushless variable frequency motor,
suitable for all kinds of refrigerants such as R32, R600 and so on. | Embedded Vacuum Gauge
Accurate, intuitive and convenient. |
|---|--|---|---|

型号 Item No.	WK-C2BM	WK-C2S	WK-C4BM	WK-C4S
速率 Flow Rate	2.5 CFM 70 L/MIN	2.5 CFM 70 L/MIN	4.5 CFM 127 L/MIN	2.5 CFM 70 L/MIN
级数 Pole No.	双级 Dual Stages	单级 Single Stage	双级 Dual Stages	单级 Single Stage
极限真空 Ultimate Vac.	2x10 ⁻¹ Pa 15 microns	2 Pa 60 microns	2x10 ⁻¹ Pa 15 microns	2 Pa 60 microns
功率 Power	1/4 HP	1/4 HP	1/4 HP	1/4 HP
接口 Inlet Port	1/4" flare	1/4" flare	1/4" & 3/8" flare	1/4" & 3/8" flare
润滑油量 Oil Capacity	200 ml	260 ml	320 ml	380 ml
外形尺寸 Dimension	381x248x262 mm	381x248x262 mm	364x118x279 mm	364x118x279 mm
净重 Weight	3.9 kgs	3.4 kgs	6 kgs	5.5 kgs



智能真空泵

Intelligent Vacuum Pump

专利产品 PATENTED

特点 Feature

- ★无火花无刷电机适用于R1234YF,R290,R32等可燃制冷剂。
- ★外观新颖，更轻便。
- ★整体式缸体，气密性极高，质量更可靠。
- ★Sparkless brushless motor use for R1234YF,R290,R32 flammable refrigerants.
- ★Portable and novel appearance.
- ★Integrated cylinder, superior air impermeability.

单级智能真空泵 Single Stage Intelligent Vacuum Pump

型号 Item No.	WK-2S	WK-3S	WK-4S	WK-6S
速率 Flow Rate	2.5 CFM 71 L/MIN	3.5 CFM 99 L/MIN	4.5 CFM 127 L/MIN	6.5 CFM 184 L/MIN
级数 Pole No.	单级 Single Stage	单级 Single Stage	单级 Single Stage	单级 Single Stage
极限真空 Ultimate Vac.	2 Pa 60 microns	2 Pa 60 microns	2 Pa 60 microns	2 Pa 60 microns
功率 Power	1/4 HP	1/3 HP	1/3 HP	1/2 HP
接口 Inlet Port	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare
泵油容量 Oil Capacity	340 ml	300 ml	300 ml	300 ml
外形尺寸 Dimension	267.5x130x265 mm	267.5x130x265 mm	267.5x130x265 mm	267.5x130x265 mm
净重 Weight	5.3 kgs	5.9 kgs	5.9 kgs	6.1 kgs

双级智能真空泵 Dual Stages Intelligent Vacuum Pump

型号 Item No.	WK-2BM	WK-3BM	WK-4BM
速率 Flow Rate	2.5 CFM 71 L/MIN	3.5 CFM 99 L/MIN	4.5 CFM 127 L/MIN
级数 Pole No.	双级 Dual Stages	双级 Dual Stages	双级 Dual Stages
极限真空 Ultimate Vac.	2x10 ⁻¹ Pa 15 microns	2x10 ⁻¹ Pa 15 microns	2x10 ⁻¹ Pa 15 microns
功率 Power	1/4 HP	1/3 HP	1/2 HP
接口 Inlet Port	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare
泵油容量 Oil Capacity	320 ml	300 ml	300 ml
外形尺寸 Dimension	296x130x265 mm	315x136x312mm	315x136x312mm
净重 Weight	6 kgs	6 kgs	7 kgs



WK-8iBM

智能真空泵
Intelligent Vacuum Pump

专利产品 PATENTED



便携背带 Portable Straps

特点 Feature

- ★采用全量程真空计 ATM~0.1 Pa。
- ★达到设定目标真空压力后背光闪烁提醒。
- ★无火花无刷电机适用于R1234YF, R290, R32等可燃制冷剂。
- ★外观新颖，更轻便。
- ★整体式缸体，气密性极高，质量更可靠。
- ★Whole pressure range vacuum meter ATM~0.1 Pa.
- ★Backlight blinking when target pressure reached.
- ★Sparkless brushless motor use for R1234YF, R290, R32 etc flammable refrigerants.
- ★Portable and novel appearance.
- ★Integrated cylinder, superior air impermeability.

智能真空泵(真空计型) Intelligent Vacuum Pump(Vacuum Meter)

型号 Item No.	WK-8Si	WK-10Si	WK-12Si	WK-6iBM	WK-8iBM	WK-10iBM	WK-12iBM
速率 Flow Rate	8.5 CFM 241 L/MIN	10.5 CFM 297 L/MIN	12.5 CFM 354 L/MIN	6.5 CFM 184 L/MIN	8.5 CFM 241 L/MIN	10.5 CFM 297 L/MIN	12.5 CFM 354 L/MIN
级数 Pole No.	单级 Single Stage	单级 Single Stage	单级 Single Stage	双级 Dual Stages	双级 Dual Stages	双级 Dual Stages	双级 Dual Stages
极限真空 Ultimate Vac.	2 Pa 60 microns	2 Pa 60 microns	2 Pa 60 microns	2x10 ⁻¹ Pa 15 microns	2x10 ⁻¹ Pa 15 microns	2x10 ⁻¹ Pa 15 microns	2x10 ⁻¹ Pa 15 microns
功率 Power	1HP	1HP	1HP	1HP	1HP	1HP	1HP
接口 Inlet Port	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare
泵油容量 Oil Capacity	600 ml	600 ml	600 ml	550 ml	550 ml	600 ml	600 ml
外形尺寸 Dimension	315x136x312mm	315x136x312mm	315x136x312mm	352x136x312mm	352x136x312mm	352x136x312mm	352x136x312mm
净重 Weight	11 kgs	11 kgs	11 kgs	11.5 kgs	11.5 kgs	11.5 kgs	11.5 kgs



WK-8BM

智能真空泵
Intelligent Vacuum Pump
专利产品 PATENTED



▲ 便携背带 Portable Straps

特点 Feature

- ★ 无火花无刷电机适用于R1234YF, R290, R32等可燃制冷剂。
- ★ 外观新颖, 更轻便。
- ★ 泵体式缸体, 气密性极高, 质量更可靠。
- ★ Sparkless brushless motor use for R1234YF, R290, R32 etc flammable refrigerants.
- ★ Portable and novel appearance.
- ★ Integrated cylinder, superior air impermeability.

智能真空泵(机械表型)

Intelligent Vacuum Pump(Pressure Gauge)

型号 Item No.	WK-8S	WK-10S	WK-12S	WK-6BM	WK-8BM	WK-10BM	WK-12BM
速率 Flow Rate	8.5 CFM	10.5 CFM	12.5 CFM	6.5 CFM	8.5 CFM	10.5 CFM	12.5 CFM
	241 L/MIN	297 L/MIN	354 L/MIN	184 L/MIN	241 L/MIN	297 L/MIN	354 L/MIN
级数 Pole No.	单级 Single Stage	单级 Single Stage	单级 Single Stage	双级 Dual Stages	双级 Dual Stages	双级 Dual Stages	双级 Dual Stages
极限真空 Ultimate Vac.	2 Pa	2 Pa	2 Pa	2x10 ⁻¹ Pa	2x10 ⁻¹ Pa	2x10 ⁻¹ Pa	2x10 ⁻¹ Pa
功率 Power	1HP	1HP	1HP	1HP	1HP	1HP	1HP
接口 Inlet Port	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare	1/4" & 3/8" flare
泵油容量 Oil Capacity	600 ml	600 ml	600 ml	550 ml	550 ml	600 ml	600 ml
外形尺寸 Dimension	315x136x312mm	315x136x312mm	315x136x312mm	352x136x312mm	352x136x312mm	352x136x312mm	352x136x312mm
净重 Weight	11 kgs	11 kgs	11 kgs	11.5 kgs	11.5 kgs	11.5 kgs	11.5 kgs

WK-15BM

智能真空泵
Intelligent Vacuum Pump



特点

- 整体双缸结构**
超高气速
更高极限真空
- 内置智能控制阀**
智能启动/回流
制冷系统停机后, 免空油的污染
- 工业级设计**
超绝气速率
- 智能电机**
功率强劲, 可在-1℃环境中正常运转
采用无刷变频电机, 适用于R32, R600等所有冷冻
- 设有气阀锁**
加速抽出废气, 不致于污染油质
- 嵌入式真空表**
精准, 直观, 方便

FEATURE

- Overall Double Steel Structure**
Ultra-high tightness.
Higher ultimate vacuum.
- Built-in intelligent control valve**
Intelligent anti-reflux.
Avoid oil contamination When the refrigeration system is shut down.
- Industrial-grade Design**
Super durable.
Ultra-high flow rate.
- Gas Ballast Valve**
Accelerate the extraction of steam without contaminating the oil.
- Intelligent Motor**
Powerful, easy to start in -1℃ environment.
Brushless variable frequency motor suitable for all kinds of refrigerants such as R32, R600 and so on.
- Embedded Vacuum Gauge**
Accurate, intuitive and convenient.

型号 Item No.	WK-15BM
速率 Flow Rate	15 CFM
	25 m ³ /h
级数 Pole No.	双级 Dual Stages
电机功率 Power	5x10 ⁻¹ Pa
极限真空 Ultimate Vac.	15 microns
接口 Inlet Port	1/4", 5/16" & 3/8" flare
泵油容量 Oil Capacity	1000 ml
外形尺寸 Dimension	364x176x310 mm
净重 Weight	12.5 kgs

DSZH 真空泵 DSZH Vacuum Pump



Chinese Patent



Perfect Exterior



Large Oil Sight Glass

单级真空泵 Single Stage

Item No. 型号	For Overseas 外销 For China 内销	WK-115	WK-125	WK-135	WK-160	WK-180	WK-1100
		WK-151.5C	WK-151.5C	WK-152C	WK-153C	WK-154C	WK-155C
Flow Rate 速率	50 Hz	1.8 CFM 42 L/MIN	2.5 CFM 70 L/MIN	3.5 CFM 100 L/MIN	6.0 CFM 170 L/MIN	8.0 CFM 226 L/MIN	10.0 CFM 283 L/MIN
	60 Hz	2.0 CFM 50 L/MIN	3.0 CFM 84 L/MIN	4.0 CFM 114 L/MIN	7.0 CFM 198 L/MIN	9.0 CFM 254 L/MIN	12.0 CFM 340 L/MIN
Ultimate Vac. 极限真空	Partial Pressure 分压	2 Pa	2 Pa	2 Pa	2 Pa	2 Pa	2 Pa
	Total Pressure 总压	150 Microns	150 Microns	150 Microns	150 Microns	150 Microns	150 Microns
Power 功率	1/4 HP	1/4 HP	1/4 HP	1/2 HP	1/2 HP	3/4 HP	1 HP
	1/4" Flare	1/4" Flare	1/4" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare
Oil Capacity 油量容量	230 ml	180 ml	240 ml	430 ml	520 ml	500 ml	500 ml
	290 x 124 x 227mm	290 x 124 x 227mm	303 x 127 x 249mm	350 x 140 x 263mm	404 x 158 x 275mm	427 x 158 x 275mm	427 x 158 x 275mm
Weight 重量	5.2 Kgs	5.4 Kgs	8 Kgs	10 Kgs	14.7 Kgs	17 Kgs	17 Kgs

双级真空泵 Dual Stages

Item No. 型号	For Overseas 外销 For China 内销	WK-215	WK-225	WK-235	WK-245	WK-260	WK-280	WK-2100
		WK-250.5C	WK-251C	WK-251.5C	WK-252C	WK-253C	WK-254C	WK-255C
Flow Rate 速率	50 Hz	1.8 CFM 42 L/MIN	2.5 CFM 70 L/MIN	3.5 CFM 100 L/MIN	4.5 CFM 128 L/MIN	6.0 CFM 170 L/MIN	8.0 CFM 226 L/MIN	10.0 CFM 283 L/MIN
	60 Hz	2.0 CFM 50 L/MIN	3.0 CFM 84 L/MIN	4.0 CFM 114 L/MIN	5.0 CFM 142 L/MIN	7.0 CFM 198 L/MIN	9.0 CFM 254 L/MIN	12.0 CFM 340 L/MIN
Ultimate Vac. 极限真空	Partial Pressure 分压	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa
	Total Pressure 总压	15 Microns	15 Microns	15 Microns	15 Microns	15 Microns	15 Microns	15 Microns
Power 功率	1/4 HP	1/4 HP	1/4 HP	1/2 HP	1/2 HP	3/4 HP	1 HP	1 HP
	1/4" Flare	1/4" Flare	1/4" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare
Oil Capacity 油量容量	230 ml	230 ml	230 ml	350 ml	400 ml	580 ml	580 ml	490 ml
	290 x 124 x 227mm	303 x 127 x 249mm	331 x 127 x 249mm	350 x 140 x 263mm	404 x 158 x 275mm	427 x 158 x 275mm	427 x 158 x 275mm	427 x 158 x 275mm
Weight 重量	5.5 Kgs	8.1 Kgs	8.2 Kgs	10.5 Kgs	15.5 Kgs	16.3 Kgs	17 Kgs	17 Kgs

DSZH 带电磁阀真空泵

DSZH Vacuum Pumps With Solenoid Valve



经久耐用

SUPER DURABLE

超高真空度

HIGH VACUUM DEGREE



68mm & 80mm
Vacuum Gauges

单级真空泵 Single Stage

Item No. 型号	For Overseas 外销 For China 内销	New Refrigerant Series 新冷媒真空泵			
		WK-135SV	WK-152SCSV	WK-160SV	WK-180SV
Flow Rate 速率	50 Hz	2.5 CFM 70 L/MIN	3.5 CFM 100 L/MIN	4.5 CFM 128 L/MIN	6.0 CFM 170 L/MIN
	60 Hz	3.0 CFM 84 L/MIN	4.0 CFM 114 L/MIN	5.0 CFM 142 L/MIN	7.0 CFM 198 L/MIN
Ultimate Vac. 极限真空	Partial Pressure 分压	2 Pa	2 Pa	2 Pa	2 Pa
	Total Pressure 总压	150 Microns	150 Microns	150 Microns	150 Microns
Power 功率	1/4 HP	1/4 HP	1/2 HP	1/2 HP	3/4 HP
	1/4" Flare	1/4" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare
Oil Capacity 油量容量	180 ml	240 ml	430 ml	520 ml	500 ml
	290 x 124 x 227mm	303 x 127 x 249mm	350 x 140 x 263mm	404 x 158 x 275mm	427 x 158 x 275mm
Weight 重量	5.7 Kgs	8.3 Kgs	10.3 Kgs	15 Kgs	17.3 Kgs

双级真空泵 Dual Stages

Item No. 型号	For Overseas 外销 For China 内销	New Refrigerant Series 新冷媒真空泵			
		WK-215SV	WK-225SV	WK-235SV	WK-245SV
Flow Rate 速率	50 Hz	1.8 CFM 42 L/MIN	2.5 CFM 70 L/MIN	3.5 CFM 100 L/MIN	4.5 CFM 128 L/MIN
	60 Hz	2.0 CFM 50 L/MIN	3.0 CFM 84 L/MIN	4.0 CFM 114 L/MIN	5.0 CFM 142 L/MIN
Ultimate Vac. 极限真空	Partial Pressure 分压	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa	2 x 10 ⁻¹ Pa
	Total Pressure 总压	15 Microns	15 Microns	15 Microns	15 Microns
Power 功率	1/4 HP	1/4 HP	1/2 HP	1/2 HP	3/4 HP
	1/4" Flare	1/4" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare	1/4" & 3/8" Flare
Oil Capacity 油量容量	230 ml	230 ml	350 ml	400 ml	580 ml
	290 x 124 x 227mm	303 x 127 x 249mm	331 x 127 x 249mm	350 x 140 x 263mm	404 x 158 x 275mm
Weight 重量	5.8 Kgs	8.4 Kgs	8.5 Kgs	10.3 Kgs	16.6 Kgs


WK-8P
表组扩孔器套装 Portable Box Set

Description	Item No.	Quantity
Deburrer	CT-207	1 PCS
Expanding tool	WK-622	1 PCS
Flaring Tool	WK-806AM	1 PCS
Manifold gauge	WK-3602S	1 PCS
Tube Cutter	WK-532	1 PCS
Plastic Box		1 PCS


WK-YD250
冷冻油加油泵 Oil Charging Pump


Oil Charging Pump 冷冻油加油泵		
Item No.	型号	WK-YD250
Suitable For Oil	适用冷冻油	All refrigeration oil
Voltage	电压	220V(110V)/50Hz(60Hz)
Max.flow	最大流量	160L/H
Max.pressure	最大压力	2.0Mpa/290psi
Power Of Motor	电机功率	1/3hp
Hose Adapter	管子接口	1/4"SAE
Weight	重量	5.5kgs


Mini Pumps
迷你真空泵 Mini Pumps

Item No. 型号	For Overseas 外销	WK-115N	WK-125N
	For China 内销	WK-1N1C	WK-1N1.5C
Flow Rate 速率	50 Hz	1.8 CFM	2.5 CFM
		42 L/MIN	70 L/MIN
	60 Hz	2.0 CFM	3.0 CFM
		50 L/MIN	84 L/MIN
Ultimate Vacuum 极限真空	Partial Pressure 分压	2 Pa	2 Pa
	Total Pressure 总压	150 Microns	150 Microns
Power	功率	1/4 HP	1/4 HP
Inlet Port	接口	1/4" Flare	1/4" Flare
Oil Capacity	泵油容量	140 ML	140 ML
Dimensions	外形尺寸	270 × 101 × 202 mm	270 × 101 × 202 mm
Weight	重量	4.2 Kgs	4.3 Kgs

手提工具箱 Portable Box Set

Description	Item No.	Quantity
Vacuum Pump	WK-115N	1 PCS
Deburrer	CT-207	1 PCS
Charging Hose	CT-360-RVB-P	1 PCS
Flaring Tool	WK-809	1 PCS
Expanding Tool	WK-622	1 PCS
Tube Cutter	WK-532	1 PCS
Manifold Gauge	WK-6003S	1 PCS
Aluminum Box		1 PCS

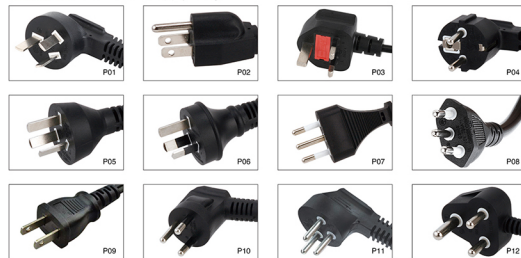
WK-7P
电源插座 AC Power Supply Plugs


Item	Description
P01	China Plug 中国
P02	America Plug 美国
P03	Britain Plug 英国
P04	Europe Plug 欧洲
P05	Argentina Plug 阿根廷
P06	Australia Plug 澳大利亚

Item	Description
P07	Italy Plug 意大利
P08	Brazil Plug 巴西
P09	Japan Plug 日本
P10	Thailand Plug 泰国
P11	Israel Plug 以色列
P12	South Africa Plug 南非

真空泵油 Vacuum Pump Oil

Item No.	Liematic Viscosity (40 °C)	Index	Flash Point	Flash Point	Type Of Oil
OIL-01	41.4-50.6mm2/s	110	240°C	~10°C	mineral
OIL-02	61.2-74.8mm2/s	130	250°C	~35°C	synthetic di-ester


进气口 Inlet Ports Adapters

Item No.	A1	A2	A3	A4
DES.	1/4"SAE	1/4" & 3/8" SAE	1/4" & 1/2" SAE	1/4" & With Valve



冷媒回收机

Recovery Machines

CHINESE PATENTED

WK-225-11 110V/60HZ

WK-225-22 220V/50HZ



- ★ Smallest 最小
- ★ Lightest 最轻
- ★ Fastest 最快
- ★ Most Reliable 最可靠

WK-RC225
Refrigerant
cooling
device
冷媒降温器



回收速率 Recovery Rate

WK-225-11 / WK-225-22

Type	推拉 Push Pull	液态 Liquid	气态 Vapor	高温气态 High Temp Vapor(104°F)	推拉 Push Pull	液态 Liquid	气态 Vapor	高温气态 High Temp Vapor(104°F)
		lb/min 英磅/分钟					kg/min 公斤/分钟	
R22	31.53	8.86	0.597	0.86	14.3	4.02	0.271	0.39
R134a	25.66	7.8	0.503	N/A	11.64	3.54	0.228	N/A
R407C	29.14	9.5	0.536	N/A	13.22	4.31	0.243	N/A
R410A	31.7	11.95	0.703	0.816	14.38	5.42	0.319	0.37



DSZH-520

冷媒回收机 Refrigerant Recovery Unit

型号 Item No.	DSZH-520
适用制冷剂 Suitable Refrigerant Gas	Iseries: R12, R134a, R401C, R500 IIseries: R22, R401A/B, R402B, R407C/D, R408A, R409A, R411A/B, R412A, R502, R509 Vseries: R402A, R404A, R407A/B, R410A, R507
气缸数量 Cylinder Quantity	2 缸 2cylinder
电源 Power	220V~240V, 50/60Hz
电机 Motor	750W(3/4HP)
转速 Rotate	1450 RPM
电流 Current	220V-4A
压缩机 Compressor	No oil lubricate Forced Air Cooling Piston style 无油润滑, 风冷活塞式
高压保护 High Pressure Protection	38.0bar / 3800kPa(551psi)
操作温度 Operating Temperature	0°C ~ 40°C / 32 ~ 104°F
外形尺寸 Dimensions	485 × 220 × 365 mm
净重 Net Weight	17 kg

WK-520D

智能冷媒回收机

Intelligent Refrigerant Recovery Unit

CHINESE PATENTED

高低压保护
HIGH AND LOW
PRESSURE PROTECTION

智能电机
INTELLIGENT MOTOR

冷却扇
COOLING FAN



人体工学设计
ERGONOMIC DESIGN

一键操作
ONE CLICK OPERATION

LCD 液晶显示屏
LCD DISPLAY

智能控制
INTELLIGENT CONTROL

双缸设计
DOUBLE-CYLINDER DESIGN

特点

一键操作
一个按钮设计
白绿、蓝、黄三色、回收于一体

高低压保护
内置多个传感器，使用更安全

智能控制
回收过程自动控制
使用轻松

双缸设计
双缸无油压缩机，回收速度快

智能电机
可选用R32冷媒
重量轻，使用方便

LCD液晶显示
让数据更清晰

FEATURE

One Click Operation
One knob design.
Self purge Liquid/vapor recovery set in one.
Easy to operate.

High And Low Pressure Protection
Built-in multiple sensors, much safer to use.

Intelligent Control
Automatic control of recovery process.
Light weight and easy to use.

Double-cylinder Design
Double cylinder oilless compressor high speed in recovery.

Intelligent Motor
R32 refrigerant is available.
Light weight and easy to use.

LCD Display
Make the data clearer.

型号 Item No.	WK-520D		
适用制冷剂 Suitable Refrigerant Gas	Iseries: R12, R134a, R401C, R406A, R500, 1234YF IIseries: R22, R401A/B, R402B, R407C/D, R408A, R409A, R411A/B, R412A, R502, R509 Vseries: R402A, R404A, R407A/B, R410A, R507, R32		
电源 Power	220V~240V, 50/60Hz		
转速 Rotate	2500 RPM		
电机 Motor	750W(1HP)		
电流 Current	220V-6A		
压缩机 Compressor	No oil lubricate, Forced Air Cooling, Piston style 无油润滑, 风冷, 活塞式		
高压保护 High Pressure Protection	38.5bar / 3850kPa(558psi)		
回收速率 Recovery Rate (kg/min)	Iseries	IIseries	Vseries
气态 Vapor	0.40	0.50	0.50
液态 Liquid	3.30	3.85	3.85
推拉 Push Pull	7.50	8.50	9.50
操作温度 Operating Temperature	0°C ~ 40°C / 32 ~ 104°F		
外形尺寸 Dimensions	375 × 250 × 320 mm		
净重 Net Weight	10 kg		